

PRODUCT DATA SHEET

3DM-CX5-GNSS/INS: GNSS Aided Inertial Navigation System

The MicroStrain 3DM-CX5 family of high-performance, industrial-grade, board-level inertial sensors provide a wide range of triaxial inertial measurements, computed attitude, and navigation solutions.

The 3DM-CX5-GNSS/INS all-in-one navigation solution features a high-performance, integrated multi-constellation GNSS receiver utilizing the GPS, GLONASS, BeiDou, and Galileo satellite constellations. Sensor measurements are fully calibrated, temperature-compensated, and mathematically aligned to an orthogonal coordinate system for highly accurate outputs. The auto-adaptive estimation filter algorithm produces highly accurate computed outputs under dynamic conditions. Compensation options include automatic compensation for magnetic anomalies, gyro and accelerometer noise, and noise effects. The computed outputs include pitch, roll, yaw, heading, position, velocity, and GNSS outputs- making it a complete GNSS/INS (GNSS Aided Inertial Navigation System) solution. Micro-Electro-Mechanical Systems (MEMS) technology provides a highly accurate, small, light-weight device.

SensorConnect software is a user friendly program for device configuration. MIP Monitor (MicroStrain Inertial Protocol) can also be used. Both packages provide for device configuration, live data monitoring, and recording. Alternatively, the MIP Data Communications Protocol is available for development of custom interfaces and easy OEM integration. The sensor operates independent of computer platform, operating system, or coding language.

PRODUCT HIGHLIGHTS

- High-performance integrated multi-constellation GNSS receiver and advanced MEMS sensor technology provide direct inertial measurements and outputs in a small package
- Triaxial accelerometer, gyroscope, magnetometer, temperature sensors, and a pressure altimeter achieve the optimal combination of measurement qualities
- Dual on-board processors run a new Auto-Adaptive Extended Kalman Filter (EKF) for outstanding dynamic position, velocity, and attitude estimates

phone +1 802 862 6629
microstrainsales@hbkworld.com
www.microstrain.com

BEST IN CLASS PERFORMANCE

- Fully calibrated, temperature-compensated, and mathematically-aligned to an orthogonal coordinate system for highly accurate outputs
- High-performance, low-drift gyros with low noise density and vibrational rectification error
- Accelerometer noise as low as 20 ug/√Hz

EASE OF USE

- SensorConnect enables simple device configuration, live data monitoring, and recording
- Optional hardware development kit available
- The MSCL API allows easy integration with C++, Python, .NET, C#, Visual Basic, LabVIEW and MATLAB environments
- MIP open byte level communication protocol
- Automatic magnetometer calibration and anomaly rejection eliminates the need for field calibration
- Automatically compensates for vehicle noise and vibration

COST EFFECTIVE

- Out-of-the-box solution reduces development time
- Volume pricing available

APPLICATIONS

- Unmanned vehicle navigation
- Robotics
- GNSS-aided navigation system
- Platform stabilization, artificial horizon
- Health and usage monitoring of vehicles



MICROSTRAIN 3DM-CX5-GNSS/INS SPECIFICATIONS



General	
Integrated Sensors	Triaxial accelerometer, triaxial gyroscope, triaxial magnetometer, pressure altimeter, temperature sensors, and GNSS receiver
Data Outputs	Inertial Measurement Unit (IMU) outputs: acceleration, angular rate, magnetic field, ambient pressure, Delta-theta, Delta-velocity COMPUTED OUTPUTS Extended Kalman Filter (EKF): filter status, GNSS timestamp, LLH position, NED velocity, attitude estimates (in Euler angles, quaternion, orientation matrix), linear and compensated acceleration, bias compensated angular rate, pressure altitude, gyroscope and accelerometer bias, scale factors and uncertainties, gravity and magnetic models, and more. Complementary Filter (CF): attitude estimates (in Euler angles, quaternion, orientation matrix) stabilized, north and up vectors, GNSS correlation timestamp Global Positioning System outputs (GPS) Global Navigation Satellite System outputs (GNSS): LLH position, ECEF position and velocity, NED velocity, UTC time, GNSS time, SV. GNSS protocol access mode available.
Pressure Altimeter	
Altitude Range	-1400 m to 10,000 m (1260-260 hPa)
Resolution	0.01 hPa RMS
Relative Accuracy	±0.1 hPa, over the range 800-1000 hPa @ T=25°C
Sampling rate	25 Hz

Inertial Measurement (IMU) Sensor Outputs			
	Accelerometer	Gyroscope	Magnetometer
Measurement Range	±8 g (standard) ±2 g, ±4 g, ±20 g, ±40 g (optional)	300°/sec (standard) ±75, ±150, ±900 (optional)	±8 Gauss
Non-linearity	±0.02% fs	±0.02% fs	±0.3% fs
Resolution	0.02 mg (+/- 8 g)	<0.003°/sec (300 dps)	--
Bias instability	±0.04 mg	8°/hr	--
Initial bias error	±0.002 g	±0.04°/sec	±0.003 Gauss
Scale factor stability	±0.03%	±0.05%	±0.1%
Noise density	20 µg/√Hz (2 g)	0.005°/sec/√Hz (300°/sec)	400 µGauss/√Hz
Alignment error	±0.05°	±0.08°	±0.05°
Bandwidth	225 Hz	250 Hz	--
Offset error over temperature	0.06% (typ)	0.04% (typ)	--
Gain error over temperature	0.03% (typ)	0.03% (typ)	--
Vibration induced noise	--	0.072°/s RMS/g RMS	--
Vibration rectification error (VE)	--	0.001°/s/g ² RMS	--
Sampling rate	1 kHz	4 kHz	100 Hz
IMU Filtering	Digital sigma-delta wide band anti-aliasing filter to digital averaging filter (user adjustable) scaled into physical units.		
IMU data output rate	1 Hz to 500 Hz (standard mode) 1 Hz to 1000 Hz (sensor direct mode)		

Operating Parameters	
Communication	USB 2.0 (full speed), TTL serial (3.0 V dc, 9,600 bps to 921,600 bps, default 115,200)
Power source	+3.2 to +5.2 V dc
Power consumption	500 mW (typ)
Operating temperature	-40°C to +85°C
Mechanical shock limit	500g/1ms absolute maximum survivability.*
MTBF	400,094 hours (Telcordia method, GM/35C)
Physical Specifications	
Dimensions	38 mm x 24 mm x 9.7 mm
Weight	8 grams
Enclosure material	Aluminum
Regulatory compliance	CE, REACH, RoHS
Integration	
Connectors	Data/power: Samtec FTSH Series GNSS antenna: MMCX type Connectivity kit: Micro-D9
Software	SensorConnect and MIP Monitor software included; Windows XP/Vista/7/8/10 compatible
Data Communications Protocol (DCP)	Protocol compatibility across GX3, GX4, RQ1, GQ4, GX5, CX5 and CV5 product families
Software development kit (SDK)	MicroStrain Communication Library (MSCL) open source license includes full documentation and sample code.

*Prolonged exposure to >2x full scale range can result in permanent damage. See manual for details

Computed Outputs	
Position accuracy	±2 m RMS horizontal, ± 5 m RMS vertical (typ)
Velocity accuracy	±0.1 m/s RMS (typ)
Attitude accuracy	EKF outputs: ±0.25° RMS roll and pitch, ±0.8° RMS heading (typ), CF outputs: ±0.5° roll, pitch, and heading (static, typ), ±2.0° roll, pitch (dynamic, typ)
Attitude heading range	360° about all axes
Attitude resolution	< 0.01°
Attitude repeatability	0.2° (typ)
Calculation update rate	500 Hz
Computed data output rate	EKF outputs: up to 500 Hz CF outputs: up to 500 Hz

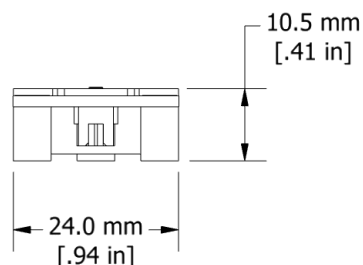

Document 8400-0118 Revision H