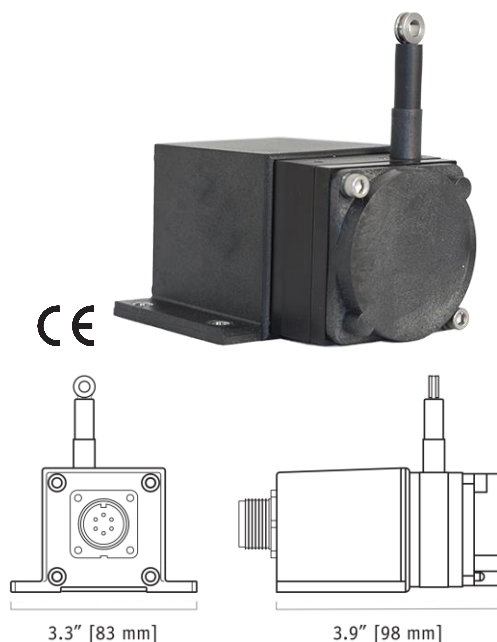
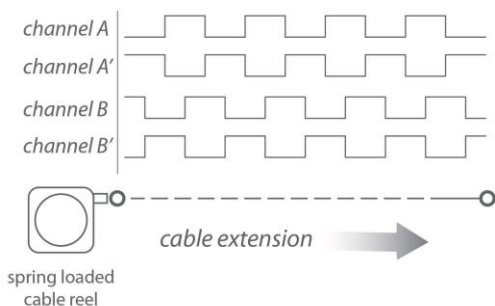




The heart of the PT1E is an incremental optical encoder which delivers a quadrature formatted digital pulse train. This compact transducer is available with several resolution options for a wide variety of applications from high accuracy position feedback to slow velocity feedback requirements.

The PT1E has many options available including full stroke measurement ranges from 0-2 inches up to 0-50 inches, different output drivers and alternate measuring cable exits.

Output Signal



-- see ordering information for available channels

PT1E

Cable Actuated Sensor Industrial Grade • Incremental Encoder

Linear Position to 50 inches (1270 mm)

Aluminum and Polycarbonate Enclosure

Compact Design • Incremental Encoder Output Signal

IP65 • NEMA 4 Protection

General

Full Stroke Range	0-2 to 0-50 inches
Output Signal	incremental encoder (quadrature)
Accuracy	$\pm 0.04\%$ full stroke
Repeatability	$\pm 0.02\%$ full stroke
Resolution Options	25 to 1250 pulses per inch
Measuring Cable	.019-in. dia. nylon-coated stainless steel
Enclosure	glass-filled polycarbonate and black anodized aluminum
Sensor	optical encoder
Maximum Retraction	see ordering information
Acceleration	
Weight	1 lb. max.


Electrical

Input Voltage	see ordering information
Input Current	see ordering information


Environmental

Enclosure	NEMA 4, IP 65
Operating Temperature	0° to 160°F (-17° to 71°C)
Vibration	up to 10 g to 2000 Hz maximum


Outline Drawing



Range	A
25, 625	1.04 [26,4]
50, 1250	0.74 [18,8]
inches [mm]	

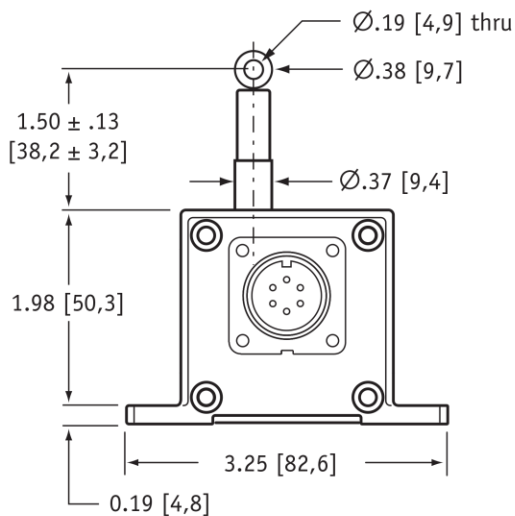

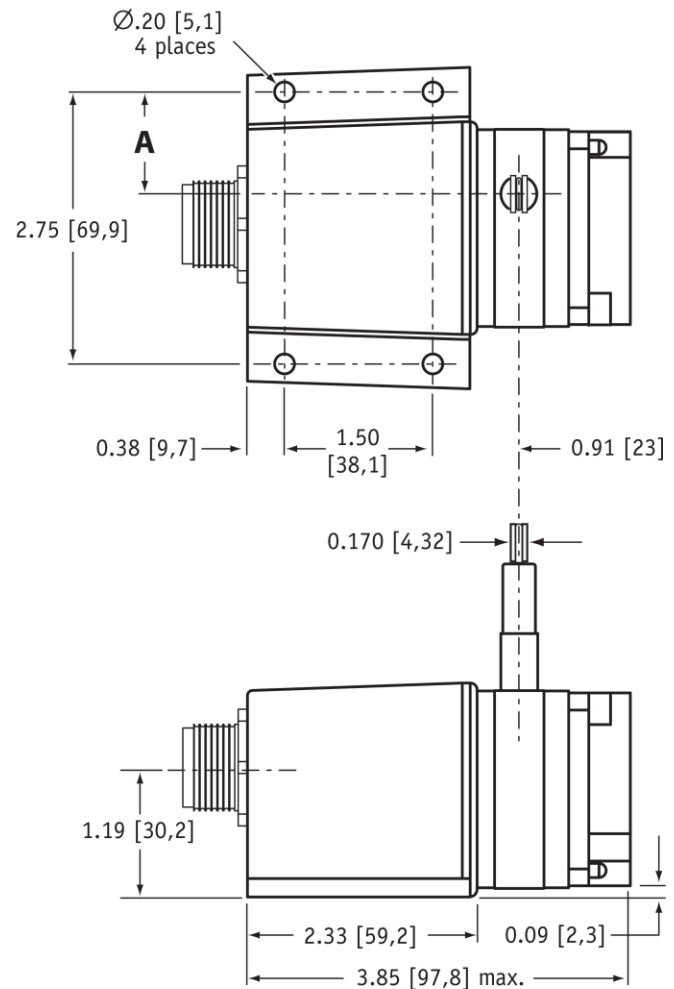DIMENSIONS ARE IN INCHES [MM]
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.



* tolerance = +.005 - .001 [+.13 -.03]
** tolerance = +.005 - .005 [+.13 -.13]

Ordering Information

Model Number:

PT1E - **R** - **A** - **B** - **C** - **D** - **E**
order code:

Sample Model Number:





PT1E - 25 - UP - 50 - AB-TTL - MC4 - SG

R range: 25 inches
A measuring cable exit: up
B resolution: 50 pulses per inch
C electrical connection: 4-pin micro connector
D output signal: TTL/CMOS driver, Channels A,B
E cable guide: spring-loaded guide

Full Stroke Range:

R order code:	25	50	625	1250
full stroke range, min:	25 in.	50 in.	625 mm	1250 mm
cable tension (±20%):	12 oz.	6 oz.	3,3 N	1,6 N
cable acceleration, max.:	11 g	4 g	11 g	4 g
resolution options:	50, 500, 1000, 1250 pulses per inch	25, 250, 500, 625 pulses per inch	2, 20, 40, 50 pulses per mm	1, 10, 20, 25 pulses per mm





Cable Exit:

A order code:	UP	DN	FR	BK																				
direction:	up	down	front	back																				
																								
	$3.67 \pm .13$ [93.2 ± 3.2]	$1.48 \pm .13$ [37.6 ± 3.2]	$1.20 \pm .13$ [30.5 ± 3.2]	$1.20 \pm .13$ [30.5 ± 3.2]																				
	A	A	B	C																				
	<table> <tr> <th>measurement range —</th><th>25</th><th>50</th><th>625</th><th>1250</th></tr> <tr> <td>A</td><td>1.04 in. 26,4 mm</td><td>0.74 in. 18,8 mm</td><td>1.04 in. 26,4 mm</td><td>0.74 in. 18,8 mm</td></tr> <tr> <td>B</td><td>0.75 in. 19,1 mm</td><td>0.45 in. 11,4 mm</td><td>0.75 in. 19,1 mm</td><td>0.45 in. 11,4 mm</td></tr> <tr> <td>C</td><td>1.43 in. 36,3 mm</td><td>1.73 in. 43,9 mm</td><td>1.43 in. 36,3 mm</td><td>1.73 in. 43,9 mm</td></tr> </table>				measurement range —	25	50	625	1250	A	1.04 in. 26,4 mm	0.74 in. 18,8 mm	1.04 in. 26,4 mm	0.74 in. 18,8 mm	B	0.75 in. 19,1 mm	0.45 in. 11,4 mm	0.75 in. 19,1 mm	0.45 in. 11,4 mm	C	1.43 in. 36,3 mm	1.73 in. 43,9 mm	1.43 in. 36,3 mm	1.73 in. 43,9 mm
measurement range —	25	50	625	1250																				
A	1.04 in. 26,4 mm	0.74 in. 18,8 mm	1.04 in. 26,4 mm	0.74 in. 18,8 mm																				
B	0.75 in. 19,1 mm	0.45 in. 11,4 mm	0.75 in. 19,1 mm	0.45 in. 11,4 mm																				
C	1.43 in. 36,3 mm	1.73 in. 43,9 mm	1.43 in. 36,3 mm	1.73 in. 43,9 mm																				




Resolution

B order code:	50	500	1000	1250
25-inch full stroke range:	50 ±1 pulses per inch	500 ±10 pulses per inch	1000 ±20 pulses per inch	1250 ±24 pulses per inch
B order code:	25	250	500	625
50-inch full stroke range:	25 ±0.5 pulses per inch	250 ±5 pulses per inch	500 ±10 pulses per inch	625 ±12 pulses per inch
B order code:	2	20	40	50
625 mm full stroke range:	2 ±0,04 pulses per mm	20 ±0,4 pulses per mm	40 ±0,8 pulses per mm	50 ±1 pulses per mm
B order code:	1	10	20	25
1250 mm full stroke range:	1 ±0,02 pulses per mm	10 ±0,2 pulses per mm	20 ±0,4 pulses per mm	25 ±0,5 pulses per mm

Output Signal

C order code:	AB-TTL	AB-OC	ABC-LD	ABC-UD
output driver:	TTL - CMOS	Open Collector	5 V - Line Driver	Universal Line Driver
	Input voltage (V+): 4.5...13.2 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 10.8...26.4 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 5 Vdc Sink current: 20 mA max. Input current: 150 mA max.	Input voltage (V+): 5...30 VDC Source/Sink: 20 mA max. Input current: 100 mA max, no load
				

Electrical Connection:

① *order code:***MC4**4-pin micro-connector
with 12 ft [3.5 M] cordset**M6**6-pin plastic connector
with mating plug**C25**25-ft. instrumentation cable
24 AWG, shielded

4-pin mating plug and cordset



contact view

pin	color code	TTL/CMOS Open Collector input voltage
1	RED-BLK TR.	channel A
2	RED-WHT TR.	channel B
3	RED	common
4	GREEN	common


6-pin mating plug



contact view

pin	TTL/CMOS Open Collector input voltage	5 V Line Driver Universal Line Driver input voltage
A	channel A	channel A
B	channel B	channel B
C	common	common
D	channel A	channel A'
E	channel B	channel B'
F	-	-

25-ft. cable




color	TTL/CMOS Open Collector input voltage	5 V Line Driver Universal Line Driver input voltage
red	channel A	channel A
black	channel B	channel B
green	common	common
white	channel A	channel A'
blue	channel B	channel B'
brown	-	-

Cable Guide:


② *order code:***blank**

standard cable guide

**SG**

spring-loaded guide

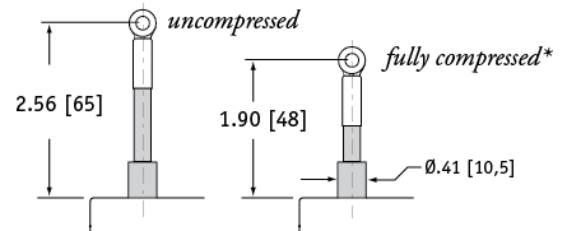cushions impact from accidental free release



*note: start of full stroke range begins at full compression point