



Spectre Corp

Model 1000HP Automotive-Aerospace Pressure Transducer

- Highest performance transducer over temperature. Zero thermal error/drift
- Units are individually calibrated from -40°C to 85°C for pressures ranging from 0-10" WC to 40,000 PSI
- 0.04% & 0.02% BFSL (STANDARD) – Contact Factory for other options
- 16 Point Calibration with Certificate (STANDARD)
- Unparalleled thermal stability from -40°C to 100°C
- Transducer maintains stated accuracy throughout entire temperature compensated range
- Duplicate any customer process and electrical connector for transparent replacement
- Push-Button Function Optional

"Spectre's 1000HP Automotive-Aerospace Pressure Transducer is the World's Top Performing Transmitter for Higher Accuracy Applications...."

FEATURES:

Proprietary Fused Bond Sensor

Sensor Wetted Material Machined from Stainless Steel Bar Stock (No Welds)


RFI/EMI Protection

Digital Correction for non-linearity and inaccuracies within the sensing element

Output Options: 4-20 mA, 0-5 V, 0-10 V (custom on request)

Suitable for high shock and vibration applications

REFERENCE DIMENSIONS:

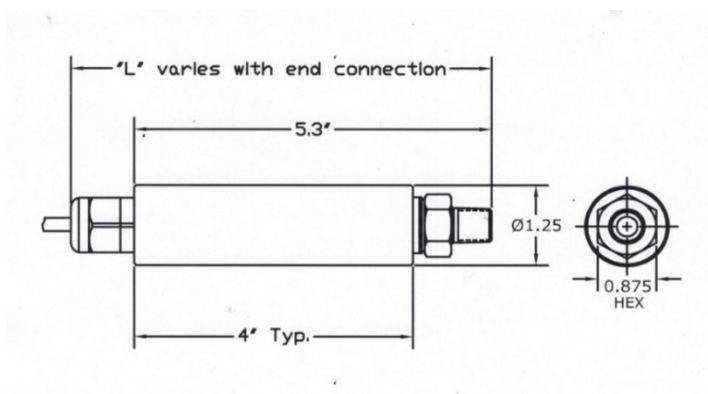

MODEL 1000HP REVISION E

02/12/23



LUNITEK srl
via Variante Aurelia 115 Bis
19038 SARZANA (SP) ITALY
CF/P.IVA 01107260117

tel. +39 0187 692070
fax +39 0187 622339
www.lunitek.it
info.sarzana@lunitek.it



Azienda con sistema di gestione
certificato Nr. 5010011753
secondo la norma UNI EN ISO 9001



Model 1000HP Automotive-Aerospace Pressure Transducer

Ordering Guide: 1000HP-A-(0-150PSI)-2-D-04-EC2-PB

A	(0-150)	2	D	04	EC2
PRESSURE PORT	RANGE ¹	TYPE	PRESSURE OUTPUT	ACCURACY (BFSL)	CONNECTOR ²
A = 1/4" MNPT	PSI	1 = ABSOLUTE	D = 4-20 mA	04 = 0.04%	EC1 = 36" PIGTAIL ³
B = SAE-4 MALE	BAR	2 = GAUGE	E = 0-5 VDC	02 = 0.02%	EC2 = LARGE DIN 43650, FORM A
C = OTHER	kPA	3 = VACUUM	F = 0-10 VDC		EC3 = MINI DIN 43650, FORM C
E = F-250 C	INCHES WC	4 = SEALED	M = mV/V		EC4 = BENDIX PTIH-10-6P
	TORR	5 = COMPOUND			ECT = TURCK M12
		6 = OTHER			ECX = OTHER

¹ OTHER RANGES AVAILABLE, CONSULT FACTORY

² CUSTOM PINOUTS/WIRING AVAILABLE, PLEASE SPECIFY UPON ORDER PLACEMENT

³ PVC STANDARD CABLE JACKET-OTHERS AVAILABLE ON REQUEST

PB OPTIONS
PB = PUSH BUTTON RE-ZERO
NO = NONE
OPX = OTHER (SPECIFY)

TYPICAL APPLICATIONS		
Engine Test Stands	Diesel-Internal Combustion	Laboratory
Leak Detection	Emission Testing	Bake Testing
Turbine-Rocket/Jet Engine Testing	Production Test Stand	Military
Transmission Testing	Off-road Vehicles	Tank Level

Performance @ 25 °C
Accuracy: < ± 0.05% BFSL to 0.02% BFSL
Stability: (2 year): <± 0.10% FSO, Typical
Overpressure Protection: 2X Rated Pressure
Burst Pressure: 5X Minimum
Pressure Cycles: > 50 Million
Temperature Range: -40 °C to 100°C
Response: ≤ 2 ms to 90%

Electrical Data
Excitation: 13-36 VDC
Current Consumption: < 5 mA
Zero Offset: ≤±0.1% of FS
Span Tolerance: ≤±0.1% of FS
Output Load: > 10K Ω

Environmental Data
Temperature
Operating: -40°C to 85°C
Storage: -50°C to 125°C
Thermal Limits
Compensated Range: -40°C to 85°C
Thermal Effect Zero: Negligible ⁴
Thermal Effect Span: Negligible ⁴

Physical Data
Sensor
Wetted Material: 316 SS
Housing: 316 SS
Connections
Pressure: 1/4" MNPT, SAE-4, F-250 C (Others on request)
Electrical: Cable, DIN, Bendix, M12 (Others on request)

⁴ Thermal changes will not affect overall accuracy