


* contact us for additional details and ordering ref



16xPDIF-S

16-Channel differential pressure sensor for CAN Bus

Range	±50 to ±1000 mBar ±0.7 to ± 15 Psi
Sensitive element	Piezzo resistive cells
Accuracy at FS	± 0.5 % FS
Non linearity/Hysteresis	± 0.7 % FS
Offset drift	± 0.5 % FS
Sensitivity drift	0.5 %
Sampling Frequency SF	200 Hz
CAN bus 2.0A	120 Ω, not installed (on demand)
Output data	Calibrated pressure : 2 bytes per channel (signed int)
Unit	1 mPSI/bit
Baud rate	125k to 1 Mbps
Data frequency	1 to 200 Hz or on trigger
Supply voltage	6 to 16V
Supply current	30 mA
Dimension	100x28x14 mm
Material	Aluminium
Weight	35 g
Vibration test	20Gpp 5'
Shock	500 G
Operating temp	5 to +85 °C
Storage temp	-40 to +125 °C

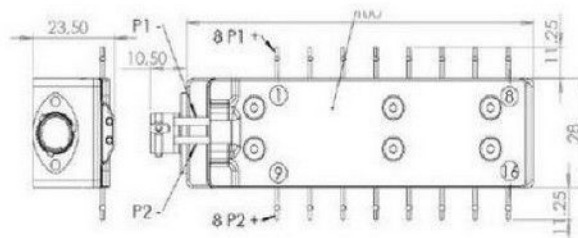

option manifold
1x 16 lane

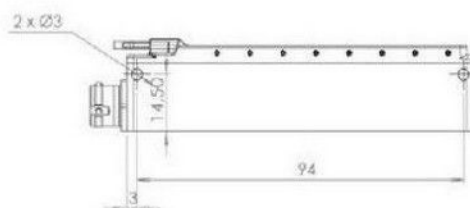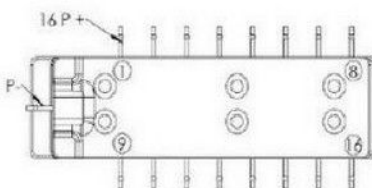

Ordering reference:

16xPDIF - range - option

50: ±50mB
350: ±350mB
1000: ±1R
N: none
Z: auto-Zero

In the interest of continuous product improvement, we reserve the right to alter without prior notice the specifications and features described in this document.

This sensor withstands high humidity. Avoid water entering in the tube as well as condensation, it may block the pressure.
Do not blow into the tubes with the mouth or a compressed air line

PIN	Function
1	Supply
2	0 V
3	CAN Low
4	CAN High
5	Reserved, do not connect
6	Reserved, do not connect

Connector : 8STA00406PN
Mating connector : 8STA60406SN